



XPOD-HD350 3D Laser Full-Foot Shoe-Last Scanner 2025.10.29

Fast true 3D laser scan with color texture

Auto landmark, measurement, and analysis report for foot scans

www.scanpod3d.com

Custom shoes and orthotic insoles for foot clinics and retail stores

XPOD-HD350 scans taller than XPOD-HD.



XPOD-HD vs XPOD-HD350



XPOD-HD vs XPOD-HD350







XPOD-HD350






XPOD-HD350

XPOD software:

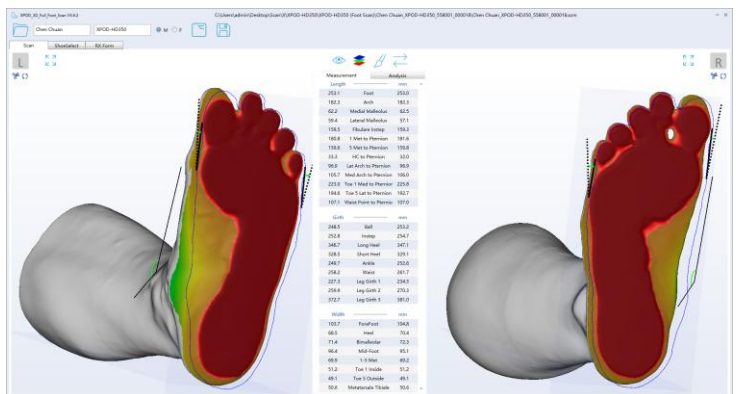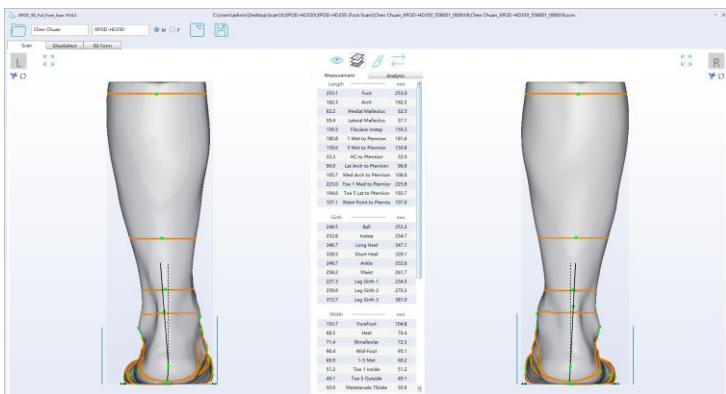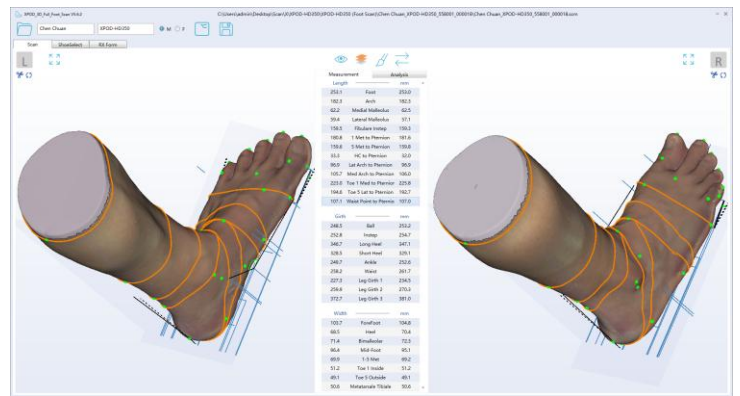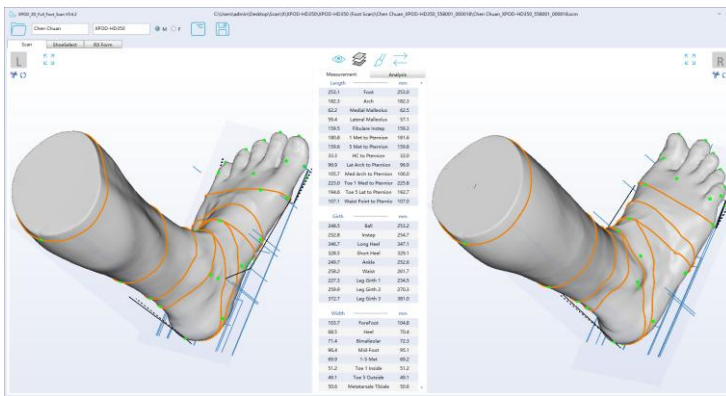

	Left	Right
Foot Length (mm)	253.1	253.0
Foot Width (mm)	103.7	104.8
Ball Girth (mm)	248.5	253.2
Toe Type	Roman	Roman
Shoe Size (EU)	40.5	40.5
Shoe Width (EU)	> G	> G

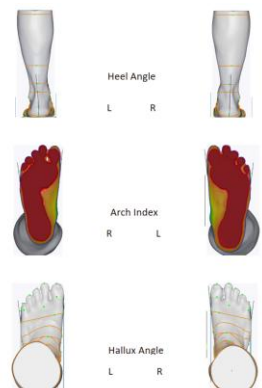



XPOD-HD350 Hardware


- Full-foot 3D with color in non/semi/full-weight
- Foam Impression and Shoe Last
- Shoe lasts (**shiny surface may require powder coating**)
- Hand scan
- Scan Speed 3.6s~13.2s depending on resolution
- Intel Core i9-12900HK/i7-13620H, 16G RAM, 4+ independent USB ports
Qualcomm CPUs NOT supported; Integrated GPU OK; Recommend MINISFORUM NAB9 Plus/NPB6
- Software UI or Foot switch to activate scan
- Normal lighting, open top coverless scan
- Clean 3D mesh, +/- 0.5mm accuracy
- Scan Volume: 380L X 180W X 350H mm
Max foot size **EU56/US20.5** with 10mm toe/heel gap
- Size: 660L X 340W X 460H mm
- Weight: 20.1Kg (44.3Lb)
- Load Capacity: 180Kg (397Lb)
- Power adapter AC 100-240V; DC 12V/5A
- Customizable panels design and color
- CE/FDA/PSE certification/registration
- One-year limited warranty

XPOD Software

- Win10/11, doesn't support Win7/8
- Auto 30 Landmark and 43 Measurements
- Auto analysis for arch type, bunion, and heel angle
- Mark landmarks on foot then drag points to match
- PDF Foot report with manual annotations
- [User-editable report templates, sell your own brand](#)
- [User-define UI and icon color and your local language](#)
- [Shoe size/width output for US/UK/EU/CN/JP standards](#)
- 3D format STL/WRL/OBJ/PLY, 2D format JPG/PNG, PDF report, CSV data file
- FTP send order to shoe/insole fabrication
- User-define RX form for orthopedic shoe/insole
- Developers: CMD/EXE call scanner to receive data-integration into your own CAD software and database
- Optional encrypt scanners to lock files
- [Also support UPOD-S and UPOD-HD scanners](#)

XPOD-HD350 Standard Configuration

- Scanner, two USB Cables (two red plugs), Power Adapter, Foot Switch, and Side Standing Steps.
PC must have four free USB-A or USB-C ports, USB2.0 or 3.0 will work.
- You supply: Laptop or desktop PC with monitor/keyboard/mouse.

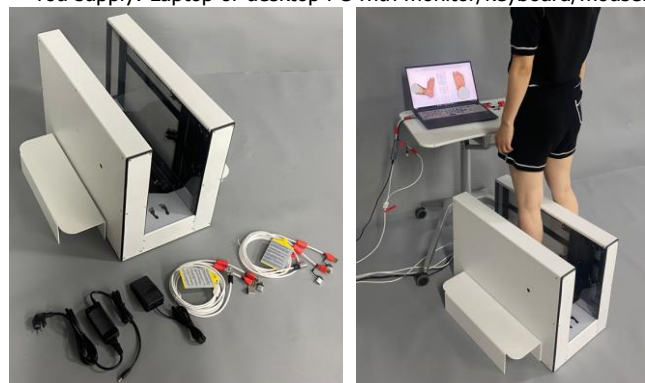


Comparison: Dimensions:




XPOD-S vs XPOD-HD2 vs XPOD-HD vs XPOD-HD350 vs XPOD-HD520


Accuracies:




XPOD-S: +/-1.0mm, good




XPOD-HD2: +/-0.5mm, excellent



XPOD-HD: +/-0.5mm, excellent




XPOD-HD350: +/-0.5mm, excellent




XPOD-HD520: +/-0.5mm, excellent


Scanned heights:

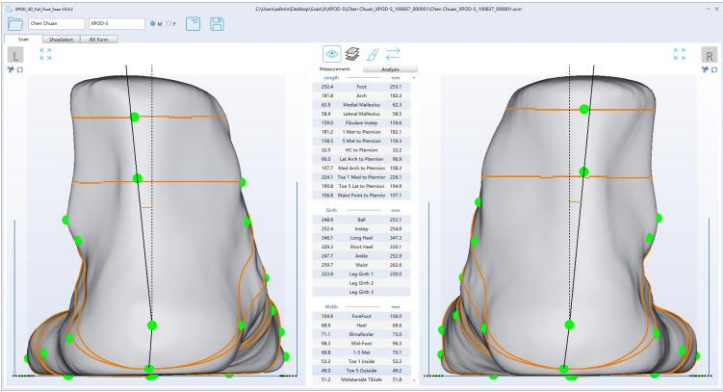


XPOD-S: 115mm

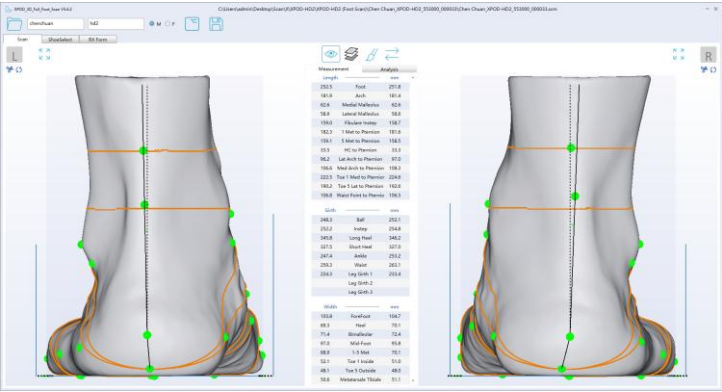

XPOD-HD2: 145mm

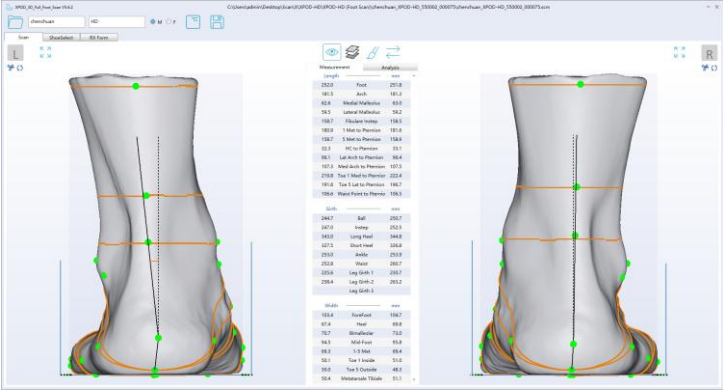

XPOD-HD: 175mm

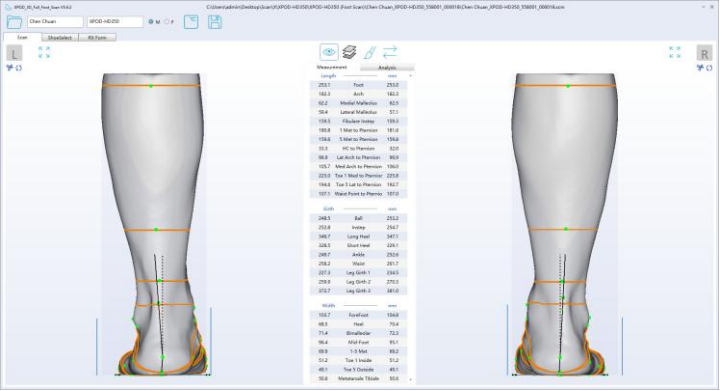

XPOD-HD350: 350mm



XPOD-HD: 520mm

Parameters:

	XPOD-S	XPOD-HD2	XPOD-HD	XPOD-HD350	XPOD-HD520
Size (mm) / Weight (Kg)	475L*255W*216H / 6.6	535L*290W*250H / 8.8	625L*290W*275H / 10.2	660L*340W *460H / 20.1	660L*340W *630H / 23.3
Scan Volume (mm)	330L*130W*115H	350L*140W*145H	380L*150W*175H	380L*180W*350H	380L*180W*520H
Speed	2.7 ~ 6.8s	3.6 ~ 13.2s		3.6 ~ 13.2s	4.2 ~ 15.5s
CPU	Intel i5-1240P			Intel Core i9-12900HK/i7-13620H	Intel Core i9-12900HK/i7-13620H
RAM / USB / Win	16G / USB Port 2.0 or 3.0 / Windows 10/11			16G / USB Port 2.0 or 3.0 / Windows 10/11	16G / USB Port 2.0 or 3.0 / Windows 10/11
3D Accuracy / 3D Files / Color	+/-1.0mm / STL, WRL, OBJ, PLY / Color Texture	+/-0.5mm / STL, WRL, OBJ, PLY / Color Texture		+/-0.5mm / STL, WRL, OBJ, PLY / Color Texture	+/-0.5mm / STL, WRL, OBJ, PLY / Color Texture
Load Capacity	180Kg			180Kg	180Kg
Power Supply (adapter)	100~240V, 12V/3A	100~240V, 12V/5A		100~240V, 12V/5A	100~240V, 12V/5A